
RXV®

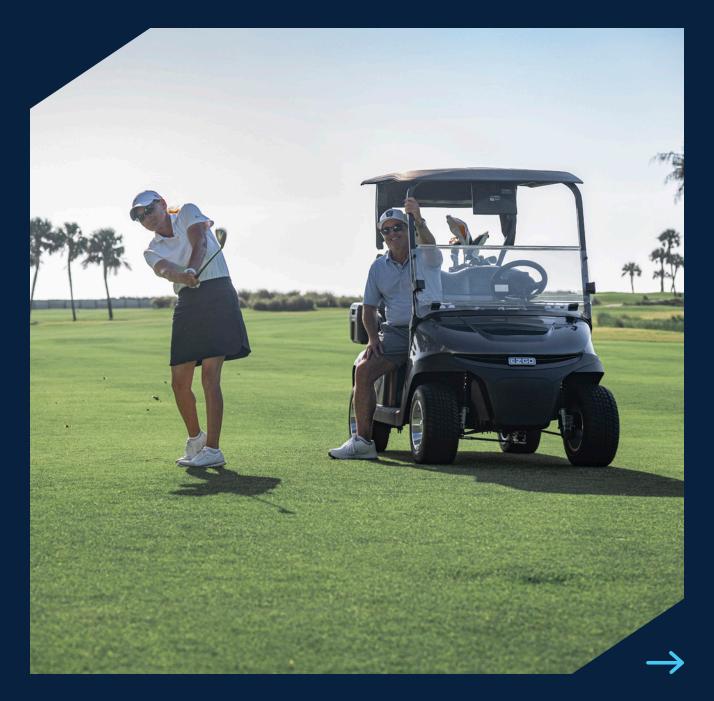

Exceptional Go. Inside & Out.

There's a reason the E-Z-G0° RXV is chosen on so many golf courses worldwide. With the industry-leading ELiTE° lithium drivetrain powered by Samsung SDI technology, ever-innovating Pace Technology[™], and a modern design that is more golf-friendly than ever before, you can trust the RXV will always be good to go.

ELITE LITHIUM DRIVETRAIN OR EX1 GAS ENGINE WITH CLOSED LOOP EFI

AUTOMOTIVE STYLE HANGING PEDALS

GOLFER-CENTRIC DESIGN



RXV



Key Features

- Golf Centric, Best-In-Class Dash
- Spacious Leg Room
- LED Headlights with Optional Upgrades (Freedom Model Only)
- Impact-Resistant Bumpers
- Oversized Bag Well
- Superior Performance
- Perfectly Tuned Power
- Refined Handling
- Industry's Lowest Operational Costs
- Optional Fold-Down Windshield
- IntelliBrake® (ELiTE)
- Industry's Most Efficient Gas Engine (EX1)
- Closed-Loop EFI System (EX1)
- Rear-Facing Seat Available in RXV 2+2 (Freedom Model)
- Optional Golf Accessories
- Modular Canopy w/ 2 Strut-Mounted Magnetic Accessories (RXV Model Only)

Color Options







ELITE

EX1

DIMENSIONS		
OVERALL LENGTH	92.5 in (235 cm)	
OVERALL WIDTH	45 in (114 cm)	
OVERALL HEIGHT (W/O ROOF)	47.5 (121 cm)	
OVERALL HEIGHT (W/ ROOF)	67 in (170 cm)	
WHEEL BASE	65.7 (167 cm)	
FRONT WHEEL TRACK	35.5 (90 cm)	
REAR WHEEL TRACK	38 (97 cm)	
GROUND CLEARANCE @ DIFFERENTIAL	4.5 in (11 cm)	4 in (10 cm)
POWER		

POWER SOURCE	56.7-VDC	Single Cylinder OHC, 4 Cycle, 9.15 cu in (150 cc)
HORSEPOWER (KW)	4.4 hp (3.3 Kw) Continuous	11.5 hp (8.6 kW) J1995 Standard
ELECTRICAL SYSTEM	48 Volt AC	Brushless DC Internal Starter Generator
BATTERIES (QTY/TYPE)	ELiTE 2.2, 56.7V Lithium	One, 12 Volt Maintenance Free
KEY OR PEDAL START	Pe	dal
BATTERY CHARGER	Lithium World Charger 56VDC 10 ft. DC Cord	N/A
SPEED CONTROLLER	235-amp Solid-State AC Controller	N/A
DRIVETRAIN	Motor Shaft Direct Drive	Continuously Variable Transmission (CVT)
TRANSAXLE	Limited Slip Differential	Differential with Helical Gears
GEAR SELECTION	Dash Mounted Forward-Neutral-Reverse	Forward-Reverse
REAR AXLE RATIO	16.99:1	11.47:1 (Forward) 14.35:1 (Reverse)

PERFORMANCE

I LIN ONMANCE		
SEATING CAPACITY	2 Passenger	
DRY WEIGHT (W/ CANOPY)	633 lb (287 kg)	710 lb (322 kg)
CURB WEIGHT (W/ CANOPY)	680 lb (308 kg)	726 lb (329 kg)
VEHICLE LOAD CAPACITY	500 lb (227 kg) (2 Passenger) or 800 lb (360kg) (4 Passenger)	
OUTSIDE CLEARANCE CIRCLE	19.2 ft (5.9 m)	19.0 ft (5.8 m)
SPEED (LEVEL GROUND)	12 mph ± 0.5 mph (19.3 kph ± 0.8 kph) 19 mph ± 0.5 mph (31 kph ± 0.8 kph) (Freedom Model)	
TOWING CAPACITY	Three E-Z-GO Golf Cars with A	Approved Permanent Tow Bar

STEERING & SUSPENSION

STEERING	Double Ended Rack & Pinion	
SUSPENSION	Independent A-Arm Coil Over Shock (Front) - Mono-Leaf Springs with Hydraulic Shocks (Rear)	
SERVICE BRAKE	Induction Motor	Rear Wheel Mechanical Self-Adjusting Drum
PARKING BRAKE	Automatic Electro-Magnetic	Self-Compensating, Single Point Engagement
TIRES	18 x 8.50-8 (4-ply rated)	

BODY & CHASSIS

FRAME	Welded Steel with Powder-Coat Protection
BODY & FINISH	Injection Molded TPO
AVAILABLE BODY COLORS	Almond, Black, Bright White, Burgundy, Forest Green, Inferno Red, Ivory, Metallic Charcoal, Ocean Grey, Patriot Blue, Platinum, Slate
STANDARD SEAT COLORS	Black, Grey, Stone Beige
PREMIUM SEAT COLORS	Black, Mushroom, Grey, White (Custom Colors Available)
SIGNATURE SEAT	Amarillo Brown, Tundra Grey (Cool Touch)
PINSTRIPE COLORS	Silver, Black, Gold





